

ADHESIVE LINED POLYOLEFIN SLEEVING

DESCRIPTION

This flexible material is a dual wall construction which offers a permanent flexible water-proof barrier.

APPLICATIONS

- Component protection
- Joint covering
- Sealing

PROPERTIES


- Operating Temperature: -55°C to $+85^{\circ}\text{C}$
- Shrink temperature : $>110^{\circ}\text{C}$
- Shrink ratios : 3:1 and 4:1
- Dielectric Strength : 15 kV/mm
- Tensile Strength : 10 MPa
- Elongation at break : 300%

CHARACTERISTICS

- Flexible
- Offers environmental protection
- Self extinguishing

AVAILABILITY

Normally in black or clear, although other colours are available on request. Standard sizes from unshrunk bore size 3mm to 52mm. Also available in continuous reels or 1.2 metre lengths.

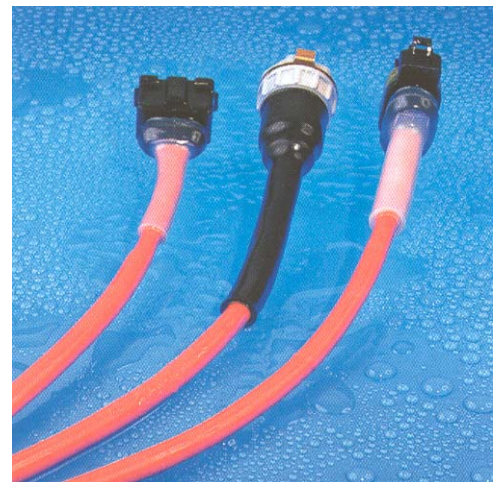

APPROVALS

MIL 23053/4 Class 3