

KYNAR HEAT SHRINK SLEEVING

DESCRIPTION

Kynar offers excellent cut through and abrasion resistance and comes in a semi-rigid form. As it's a fluoropolymer it offers long service life and very good chemical resistance.

APPLICATIONS

- Component protection
- Wire strain relief
- Good mechanical protection
- Electrical insulation

PROPERTIES


- Operating Temperature: - 55°C to +175°C
- Thermal Class : B
- Shrink temperature : >175 °C
- Shrink ratio : 2:1
- Dielectric Strength : 30 kV/mm

CHARACTERISTICS

- Excellent chemical resistance
- High temperature resistance
- Good mechanical resistance
- Self extinguishing

AVAILABILITY

Available only in clear in continuous reels or 1.2 metre lengths, in sizes from 1.2mm to 25.4mm.

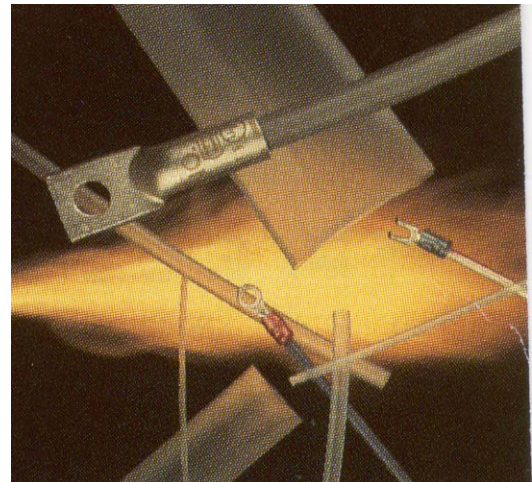

APPROVALS

MIL 23053/8 Class 1