

ADHESIVE POLYESTER TAPE

DESCRIPTION

This is the most commonly used tape, due to its high dielectric strength, good thermal resistance, and relatively inexpensive cost.

APPLICATIONS

- Electrical insulation
- Fixing
- Stress relief
- Wire harnessing
- Hold down

PROPERTIES


- Operating Temperature: +130°C
- Thermal Class : B
- Dielectric Strength : 5 kV for 50 micron thick
- Tensile Strength : 112 N/25mm
- Adhesion : 12.5 N/25mm

CHARACTERISTICS

- Good temperature resistance
- High dielectric strength
- Thermosetting adhesive
- Highly conformable

AVAILABILITY

In any width, and thicknesses from 23 micron base material to 190 micron base material, and in a range of colours, although yellow is the most commonly used. It is also available with either a thermosetting rubber or acrylic adhesive system.

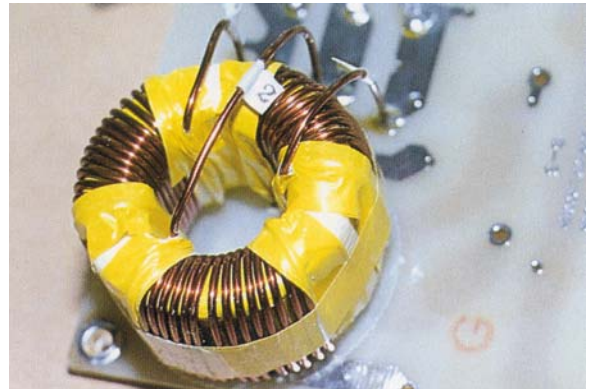

APPROVALS

UL – File No E82910(M)