

# PVC SELF BONDING TAPE


---

## DESCRIPTION

This self-bonding PVC uses friction and overlap to maintain its bond until the self bonding cycle is complete. This is 2 hours at 120°C.

## APPLICATIONS

- Cable repair
- Cable protection
- Water-proofing
- Harnessing

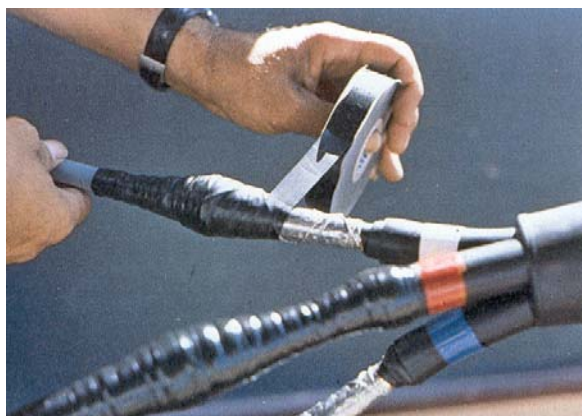

## PROPERTIES

- Operating Temperature: -18°C to +90°C
- Application temperature : 0 to 40°C
- Thermal Class : Y
- Tensile Strength : 22 N/cm
- Dielectric Strength : 6 kV
- Tape thickness : 0.13mm

## CHARACTERISTICS

- Extremely flexible
- Good dielectric strength
- Easy to use
- Water-proof
- Flame resistant

## AVAILABILITY

Available in any width, including 12mm, 19mm and 25mm as standard. Colour is black only.