


NOMEX[®] / KAPTON[®] / NOMEX[®]

DESCRIPTION

A laminate of two high performance materials, together giving superior temperature and ageing performance.

APPLICATIONS

- Slot lining
- Coil separators
- Phase separators
- High voltage insulation

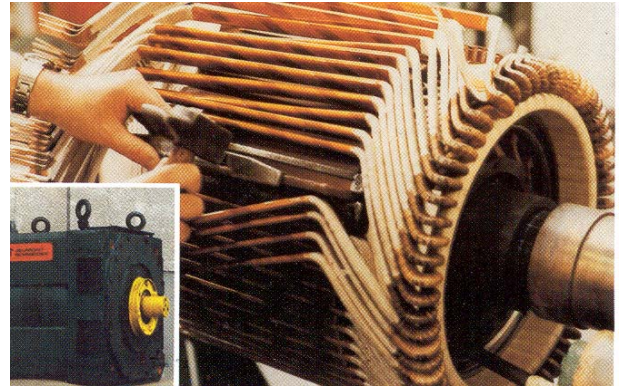

PROPERTIES

- Operating Temperature: 220°C
- Thermal Class : C
- Dielectric Strength : 30 kV/mm
- Tensile Strength : 200 N/cm for 0.18mm thick

CHARACTERISTICS

- Flexible
- High operating temperature
- Good dielectric properties
- Good chemical resistance
- Excellent ageing

AVAILABILITY

As a two-ply or three-ply laminate in a range of thicknesses from 0.1mm to 0.4mm in any width required.